

Wheel balancers

PROBALANCE 7410/7420



Automotive



PROBALANCE 7410/7420

Accelerates the workflow in tyre shops and garages with a large volume of tyre service



The performance benchmark with digital user interface for every type of tyre shop.

Overview of functions



Electrical wheel brake (PB 7420)

Mechanical wheel brake (PB 7410)



The ALU-M programme is started automatically while wheel data are recorded. Thus the workflow is accelerated. The weight position can be selected freely.

The performance benchmark for every tyre service shop

- Suitable for all tyre/wheel assemblies on motorcycles, passenger cars and light trucks
- Weight position can be selected freely
- Fast & Easy SPLIT programme:
→ Hidden weight placement without entry of the number of spokes
- Balance optimization programme as standard
- Space-saving wheel guard
- Automatic start/stop when closing the wheel guard
- Suitable for PAX wheel assemblies



BENEFITS

- Weight is placed in the recorded position
- Freely selectable weight position (ALU-M)
- Time-saving weight placement (PB 7420)
→ The gauge is locked in the recorded position
→ The wheel is automatically stopped in the position of the unbalance
- Fast & Easy SPLIT function

Standard shipment

- Quick nut or adapter sleeve (P-version) with clamping hood
- 3 cones (43 - 110 mm)
- User's manual
- Caliper
- Wheel guard

Optional accessories:

518 91 50 Probalance Wheel Lift
(lifting capacity 80 kg)

518 71 24 Width measuring sonar system
(retrofitable on PB 7410)



Please request our brochure:

Adapters and Accessories 581 30 91

PROBALANCE 7410/7420

Technical data

Shaft-dia	40 mm
Rim width	1.5" - 20"
Rim-dia	10" - 30"
Wheel width	max. 510 mm
Wheel-dia	max. 1067 mm
Wheel weight	max. 75 kg
Measuring cycle	6 s
Spin speed	< 100 U/min.
Power supply	115/230 - 50/60 V/Hz
Working pressure (P-version)	7 - 10 bar
Dimensions (L x W)	1350 x 1500 mm (with wheel guard)


Ref. No.	Description/type
518 74 30	PROBALANCE 7410
518 82 90	PROBALANCE 7420P/SONAR

The pictures shown in the brochure may differ from the delivered equipment and include optional accessories. For detailed information on optional accessories, please request the respective brochure or visit us at www.rema-tiptop.com.

We manage your workshop

One brand – One source – One system

REMA TIP TOP is synonymous for first-class products, systems and services from a single source. We convince our customers by our progressive technology, ground-breaking innovations and a world-wide service network.

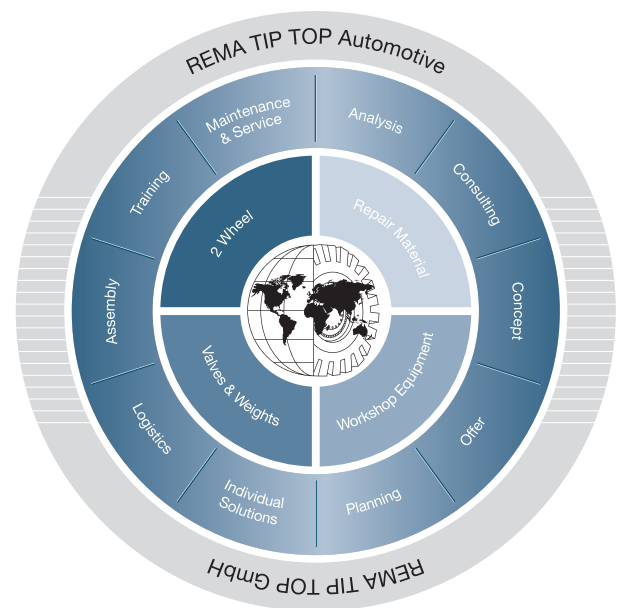

Your local contact:

REMA TIP TOP GmbH Business Unit Automotive

Gruber Straße 63
85586 Poing/Germany

Tel.: +49 81 21 707-234
Fax: +49 81 21 707-222

www.rema-tiptop.com
info@tiptop.de