

Trolley jacks

PROLIFT 215 N/215 P/222 N/312



Automotive



Application examples



Overview of functions

Trolley jacks operated by an air-hydraulic pump for all types of heavy vehicle. The piston returns automatically, and the dual decent valve allows a constant, controlled speed to be maintained under load and the jack to be raised in no-load operation. The valves remain entirely leak-proof, even when a defective air or oil pipe goes unnoticed. Special materials ensure the continued operation and resistance to breaking of these high-quality jacks, even in extreme situations.

All models comply with the EU machinery directive 98/37 and the European standard EN 1494.



BENEFITS

PROLIFT 215 N/222 N/312


- Trolley jack operated by an air-hydraulic pump for all types of heavy vehicle
- Automatic return of the piston
- Dual decent valve allows a constant, controlled speed to be maintained under load and allows the jack to be raised in no-load operation
- Special materials ensure quality and resistance to breaking, even in extreme situations

PROLIFT 215 P

- Easily transported
- Ideal for mobile service teams
- Handle easily disconnected to reduce space required and weight
- High lifting capacity
- Can be operated by vehicle's compressor

Accessories

Included with all models:

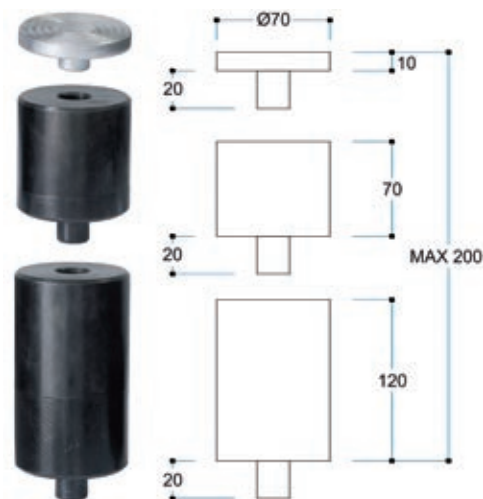

PROLIFT 215 N/215 P/222 N/312

Technical data

Prolift 215N/215P

Lifting capacity	30/15 t
Min. lifting height	150 mm
Max. lifting height	300 mm
Operating pressure	8-12 bar
Weight	39 kg (215N)/35 kg (215P)

Prolift 222N

Lifting capacity	60/30 t
Min. lifting height	220 mm
Max. lifting height	450 mm
Operating pressure	8-12 bar
Weight	71 kg

Prolift 312

Lifting capacity	60/30/18 t
Min. lifting height	120 mm
Max. lifting height	255 mm
Operating pressure	8-12 bar
Weight	50 kg

Ref. No. Description/type


519 77 29	PROLIFT 215 N
519 75 60	PROLIFT 215 P
519 75 70	PROLIFT 222 N
519 75 80	PROLIFT 312

The pictures shown in the brochure may differ from the delivered equipment and include optional accessories. For detailed information on optional accessories, please request the respective brochure or visit us at www.rema-tiptop.com.

We manage your workshop

One brand – One source – One system

REMA TIP TOP is synonymous for first-class products, systems and services from a single source. We convince our customers by our progressive technology, landmark innovations and a world-wide service network.

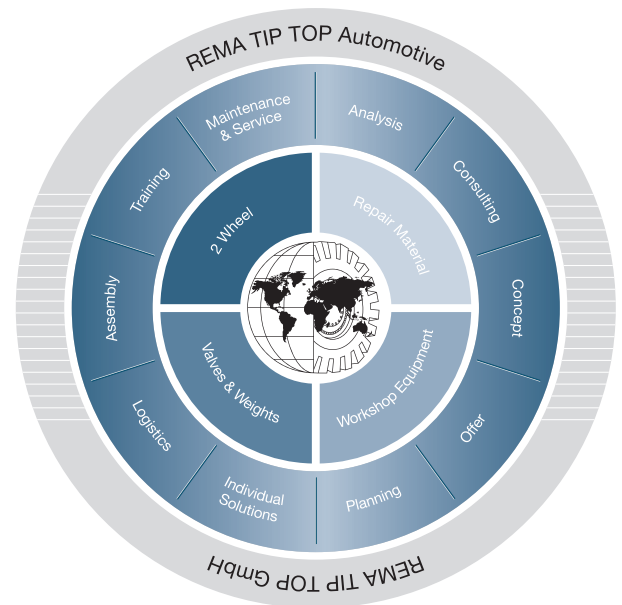

Your local contact:

REMA TIP TOP GmbH Business Unit Automotive

Gruber Straße 63
85586 Poing/Germany

Tel.: +49 81 21 707-234
Fax: +49 81 21 707-222

www.rema-tiptop.com
info@tiptop.de