

Vulcanizing material, equipment and accessories

SEALFIX SUPER STRINGS



Automotive



SEALFIX SUPER STRINGS



510 18 49



510 18 32



510 18 01



510 22 40



510 18 18



It happens like this...

A small nail or a screw works itself into the tyre tread, and then penetrates the casing. Unless the injury is sealed, the tyre pressure drops. The flexing strain thus put on the rubber generates destructive heat build-up until the tyre fails completely. Therefore, it is essential to seal the injury as quickly as possible, and to re-inflate the tyre.



BENEFITS

- Seals nailhole injuries very quickly
- **No need for demounting tyres***
Sealing from outside*
- Helps you to get back on track quickly
- **Ideal for roadside repairs**
Saves you high costs due to destroyed tyres and rims
- Available as a kit including tools or as a replacement pack

* Observe country-specific repair regulations. When using the product in the Federal Republic of Germany, observe the German regulations on the repair of pneumatic tyres (Vkbl.2001, page 91)

DO IT YOURSELF!

This is how you can handle the problem yourself.

The driver can seal the puncture by himself, using TIP TOP SEALFIX strings, directly on site, before the tyre has run flat, and prior to the ingress of dirt or water. Demounting the wheel is not necessary, at this stage as the tyre is sealed from outside*.

The foreign body is pulled out. The puncture is marked, and cleaned with the hand


rasp. The Special Cement BL is then introduced into the puncture channel using the inserting tool. The tyre is inflated as far as possible. Then, the repair string is inserted deep into the puncture channel. Finally, the inserting tool is removed, and the tyre is fully inflated. The protruding end of the repair string has to be cut off.

SEALFIX SUPER STRINGS

Ref. No.	Description/type
510 18 49	SEALFIX driver kit (contents: 5 strings for passenger cars, hand rasp, inserting tool, Special Cement BL 12 g)
510 18 32	SEALFIX workshop kit (contents: 25 strings, hand rasp, inserting tool, Special Cement BL 40 g, chalk, knife)
510 18 01	SEALFIX replacement pack for passenger cars (contents: 50 strings)
510 18 63	SEALFIX replacement pack for trucks (contents: 25 strings)
510 22 40	Hand rasp (6 mm diameter)
510 18 18	SEALFIX inserting tool

We manage your workshop. Quality with a system.

REMA TIP TOP is synonymous for first-class products, systems and services from a single source. We convince our customers by our progressive technology, ground-breaking innovations and a world-wide service network.

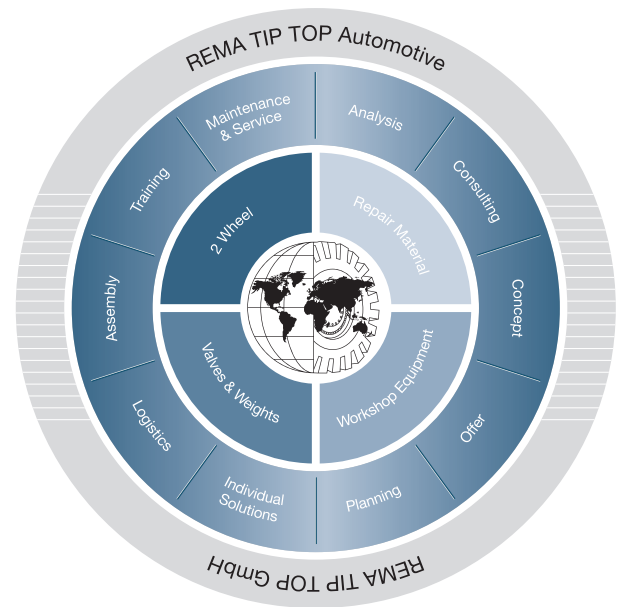

The pictures shown in the brochure may differ from the delivered equipment and include optional accessories. For detailed information on optional accessories, please request the respective brochure or visit us at www.rema-tiptop.com.

Your local contact:

REMA TIP TOP GmbH Business Unit Automotive

Gruber Straße 63
85586 Poing/Germany

Tel.: +49 81 21 707-234
Fax: +49 81 21 707-222

www.rema-tiptop.com
info@tiptop.de